

UCRL- 83981
PREPRINT

ELECTROSTATIC LEVITATION AND TRANSPORT OF
LASER FUSION TARGETS

Wayne L. Johnson
Charles D. Hendricks

This paper was prepared for submittal to
IEEE/IAS 1980 Annual Meeting
Cincinnati, Ohio
September 28 thru October 2, 1980

May 22, 1980

The logo for Lawrence Livermore Laboratory, featuring a stylized 'L' symbol and the text 'Lawrence Livermore Laboratory' arranged in a chevron shape.

Lawrence
Livermore
Laboratory

This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

CIRCULATION COPY
SUBJECT TO RECALL
IN TWO WEEKS

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

ELECTROSTATIC LEVITATION AND TRANSPORT OF LASER FUSION TARGETS*

Wayne L. Johnson and Charles D. Hendricks

University of California
Lawrence Livermore National Laboratory
Livermore, California

ABSTRACT

Several levitation concepts have been evaluated resulting in the electrostatic quadrupole being chosen as the most universal. A levitator has been constructed to handle laser fusion targets during and between the processing steps. The levitator is based on a quadrupole rail which is segmented to provide electrically controlled transport and confinement along the rail. This device has demonstrated transport both vertical and horizontal of targets with appropriate mass to size ratios and exhibits remarkably stable confinement at atmospheric pressure.

*Work performed under the auspices of the U.S. Department of Energy by the Lawrence Livermore National Laboratory under contract number W-7405-ENG-48.

Projected laser fusion targets for power reactors will require surface finishes on the order of 100 to 1000 Å and targets must be delivered with reliabilities approaching 100% at rates of 1 to 10 per second. One concept to provide these targets is to sequentially lead a single target through several well characterized processes.⁽¹⁾

Non-contact support, manipulation, and transport of these targets ease contamination problems and should improve the controllability of any process. Several levitation schemes seem capable of this task but with reservations specific to the material of the target, process and technique of levitation. Of these schemes the electrodynamic levitator appears the most versatile.

The electrodynamic levitator applies a centering force on the target through the charge on the shell precisely the way a quadrupole mass spectrometer centers ions along its axis.⁽²⁾ As shown in Figure 1 four electrodes are given a combination of a.c. and d.c. fields to provide stable levitation for particles of a particular charge-to-mass ratio. In the quadrupole mass spectrometer, the fields are tuned to give maximum resolution while in the case of a levitator, the fields are tuned to stably levitate the maximum range of charge-to-mass ratios. With particles of low charge-to-mass ratio further stability is gained by aligning two of the electrodes with gravity and applying a counteracting field.

Figure 2 shows the electrode geometry employed to suspend and transport targets. The normal quadrupole electrodes are segmented and

the transport fields are applied to all four adjacent segments in addition to the levitation fields. Every third electrode segment is tied together and is driven with one phase of a three phase supply to provide the transport fields. This arrangement allows the direction of target travel to be unique.

Figure 3 shows the simple circuit required to levitate and transport the shells. Typical levitation voltages are 2000 volts at 60 Hz A.C. and a 300 volts D.C. gravity counter potential. This circuit uses conventional power transformers and can drive transport systems up to 100 meters long. The transport fields are supplied through programmable power supplied to provide a frequency, i.e. transport velocity variability. In its eventual usage these fields could also be 60 Hz with adjustment of the electrode length to speed or slow the particle. This system would then use conventional and very inexpensive circuitry.

The system transports targets at velocities of from .01 to 10 cm/sec in air. The lower velocity is limited by the circuitry and the upper velocity is determined by the equating of the air drag with the maximum transport fields the circuitry can provide. The system levitates shells reliably for several days. When fully loaded, shells are spaced every third segment and travel in unison with only slight coupling of motion between adjacent particles.

Operating, horizontally or vertically, the direction of the targets transport is changed by reversing the phases of the transport fields. In

vertical operation, the maximum transport field is used to assure stability as the transport forces imposed at the target only marginally exceed the force of gravity. In horizontal operation, the D.C. gravity bucking fields allow remarkably smooth and stable operation under all conditions.

The targets are commercially available Ni shells with diameters up to 800 μm . These shells are injected and charged by an axially mounted injector. This injector consists of two plates separated by 1 cm across which ~ 10 Kv is impressed. The shells oscillate randomly between the plates, charge exchanging at each plate. A small hole in one plate allows an occasional charged shell to be propelled down the axis of the levitator electrodes. Typical charge-to-mass ratios of 10^{-4} C/Kg are measured and agree well with 4×10^{-4} C/Kg calculated by Cho⁽³⁾ for a shell on a plate in a field.

$$q = 1.65 \cdot 4\pi \epsilon_0 R_S^2 E$$

The main disadvantage to electrodynamic levitation for processing is that charge must be maintained on the shell during the process. Some of our current processes, especially plasma coating processes, would not be directly extendable to electrodynamic levitation. Other processes such as DT fill, sorting, and neutral beam coating are directly extendable.

In the future, we must develop simple controlling circuitry to reliably transport shells. The levitator must be mated to each process

and then the transition between the different process environments must be developed. Electrodynamic levitation is pursued as the first choice for non-contact manipulation and support of processes needing reliable, precise control of three dimensional high expense objects.

NOTICE

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately-owned rights.

Reference to a company or product name does not imply approval or recommendation of the product by the University of California or the U.S. Department of Energy to the exclusion of others that may be suitable.

References

- 1) C. D. Hendricks and W. L. Johnson, "Power Plant Production of Inertial Confinement Fusion Targets," Lawrence Livermore Laboratory Report, UCRL-52539, February 15, 1979.
- 2) R. E. Wuerker, H. Shelton and R. V. Langmuir, J. Appl. Phys. 30, 342 (1959).
- 3) A. Y. H. Cho, "Contact Charging of Micron-sized Particles in Intense Electric Fields," J. Appl. Phys. (USA), Vol. 35, No. 9, 2561-4 (Sept. 1964).

Figure Captions

- Fig. 1 The standard quadrupole rail is used to discriminate between different charge-to-mass ratio as operated in a quadrupole mass spectrometer. The same configuration can also be tuned to levitate a wide range charge-to-mass ratio particles as operated in the transport levitator.
- Fig. 2 In the transport levitator the rails are segmented and a three phase transport field is applied between the segments. Particles occupy a slot at every third segment in a fully loaded transport system.
- Fig. 3 The voltage supplies for this system are simple 60 cycle power transformers combined with DC supplies.

Q-pole rail

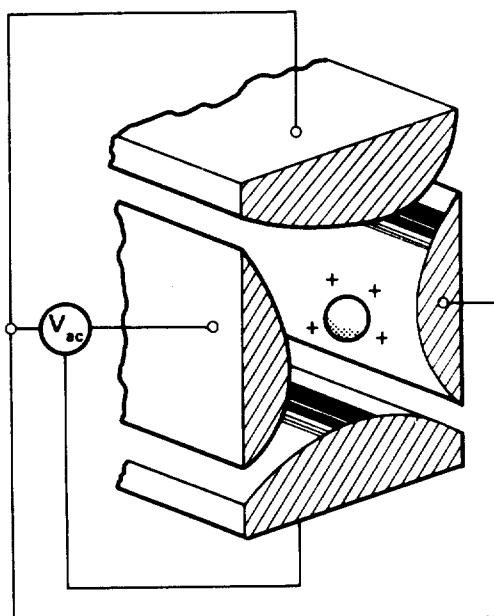


FIGURE 1

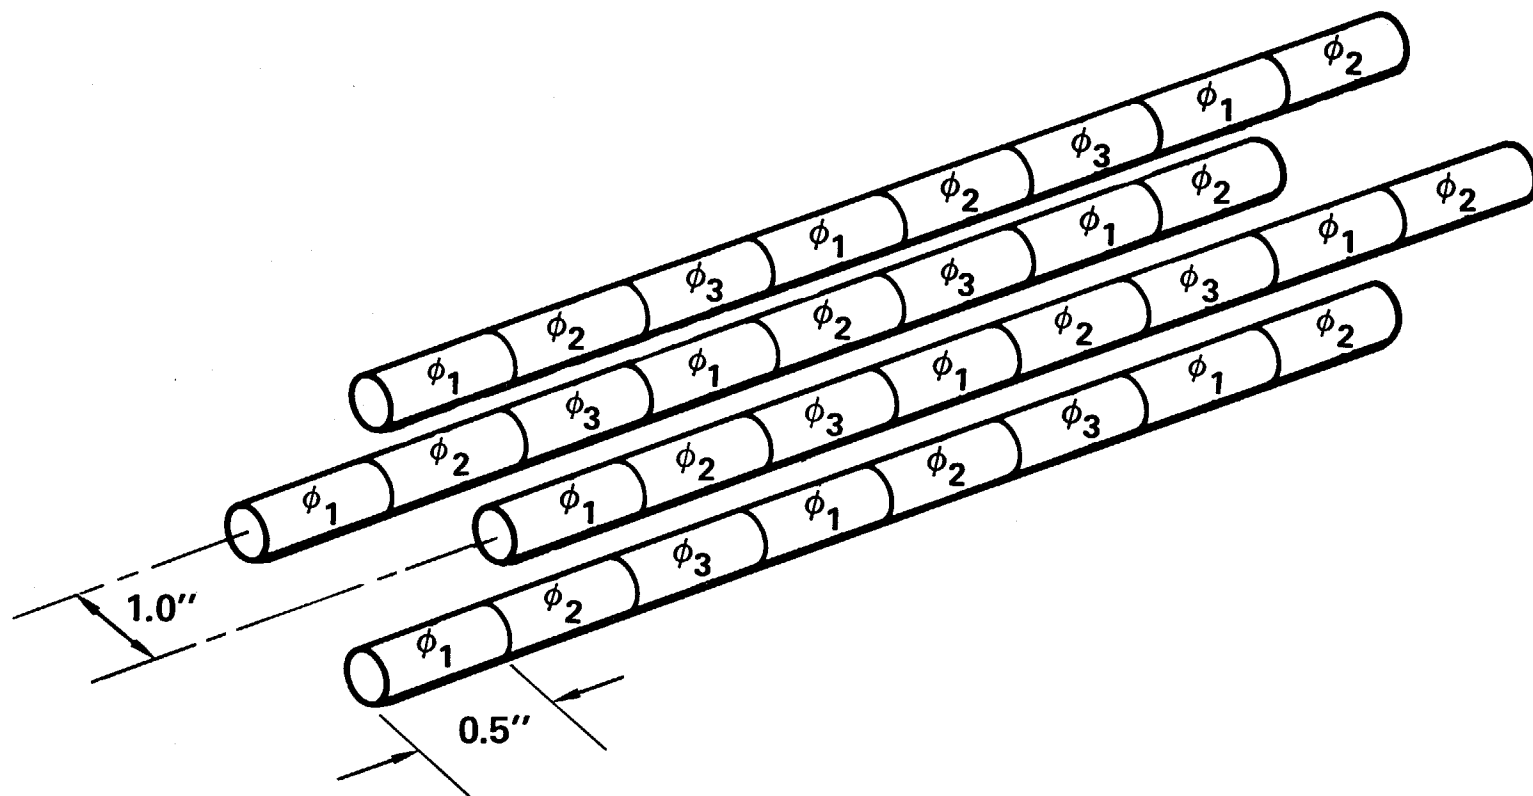


FIGURE 2

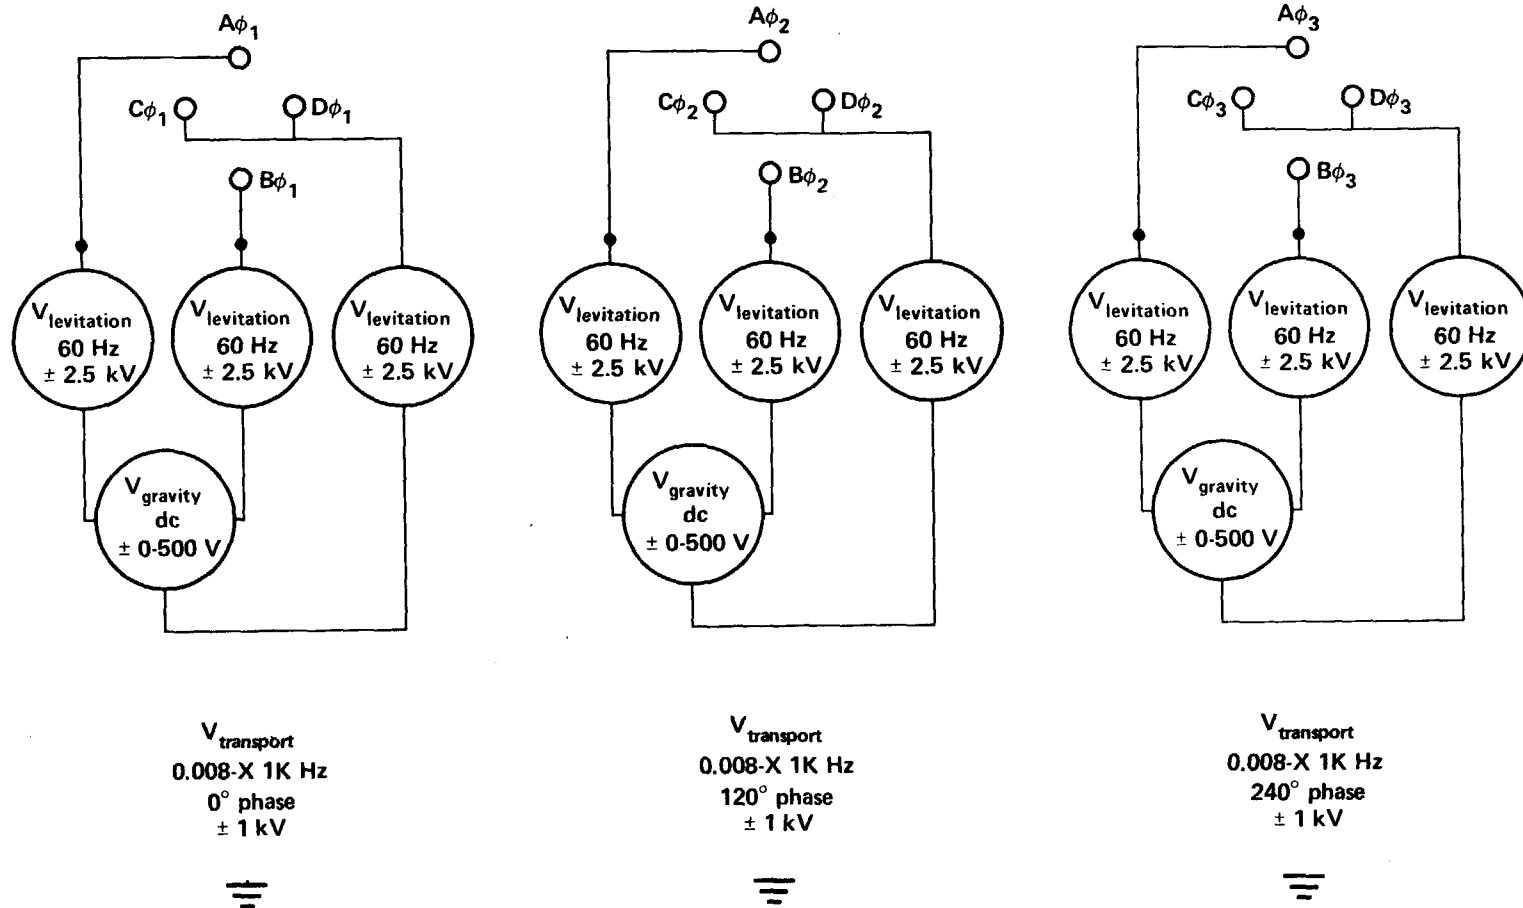


FIGURE 3

